


3RW Soft Starters


Project planning aids

3RW44 2., 3RW44 3. and 3RW44 4. for High-Feature applications

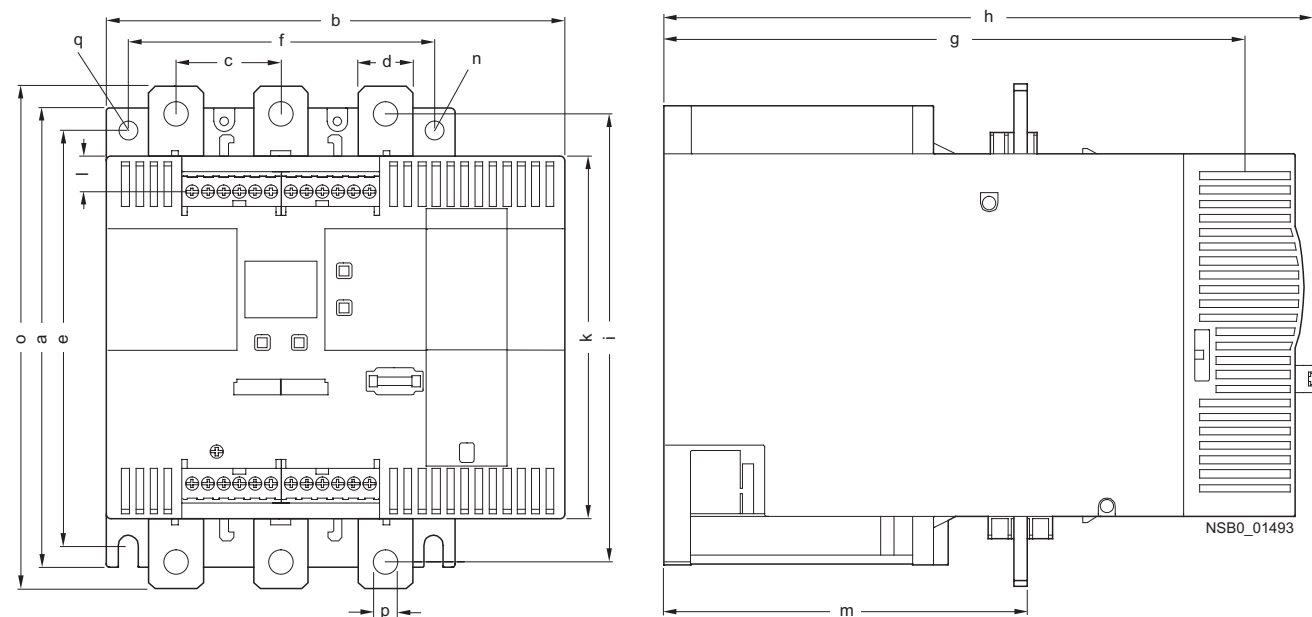

Type/Dimension (mm)	a	b	c	d	e	f	g	h	i	k	l	m	N	o	p	q
3RW44 2.	180	170	37	11	167	100	240	270	180	148	7.5	153	7	184	6.6	M6, 10 Nm
3RW44 3.	180	170	37	17	167	100	240	270	180	148	7.5	153	7	198	9	M6, 10 Nm
3RW44 4.	210	210	48	25	190	140	269	298	205	166	16	166	9	230	11	M8, 15 Nm

3RW44 5. and 3RW44 6. for High-Feature applications

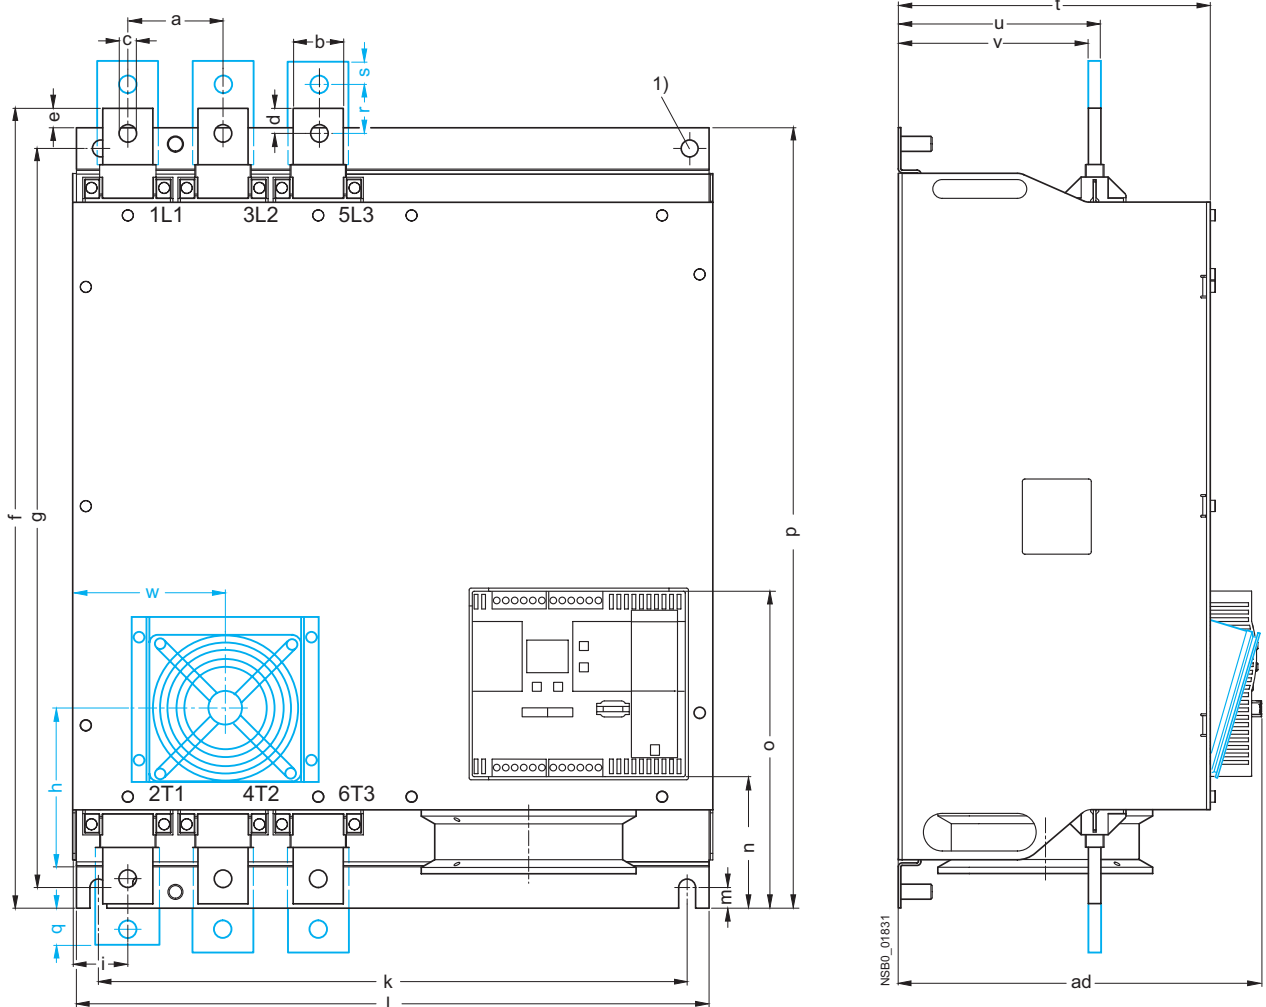


¹⁾ For M12 screw, tightening torque max. 35 Nm (310 lb.in).

Type/Dimension (mm)	a	b	c	d	e	f	g	h	i	k	l	m
3RW44 5.	76	40	14	20	15.5	638.5	590	--	44	470	510	16.5
3RW44 6.	85	50	14	--	--	667	660	160	37.5	535	576	16.5

Type/Dimension (mm)	N	o	p	q	r	s	t	u	v	W	ad
3RW44 5.	105	253	623	--	--	--	249	162	152	--	290
3RW44 6.	103	251	693	43.5	40	20	249	162	151.4	123	290

3RW49 00-0AC00 external display and operator module

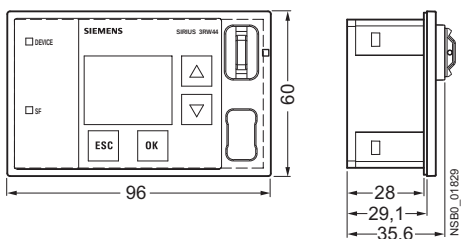

Installation cutout for 3RW49 00-0AC00 external display and operator module

