

Low-Voltage Fuse Systems

SITOR Fuse Links for Special Applications

For railway supply rectifiers

Characteristic curves


Series 3NC7 3..-2

Operational class: aR


Rated voltage: 680 V AC

Rated current: 250 A, 350 A


Time/current characteristics diagram

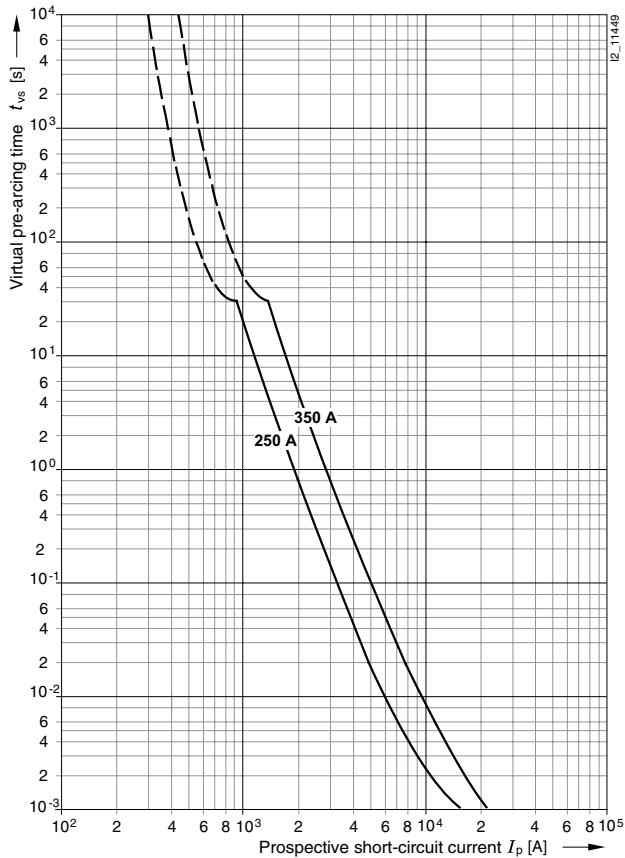

Correction factor k_A for breaking I^2t value

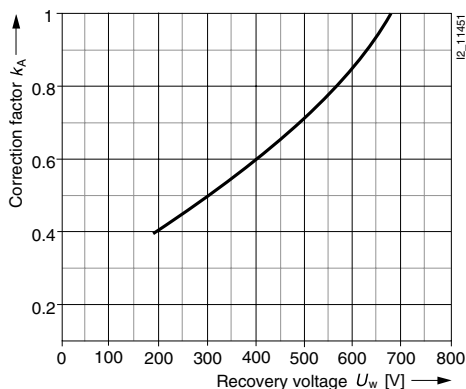

Let-through characteristics (current limitation at 50 Hz)

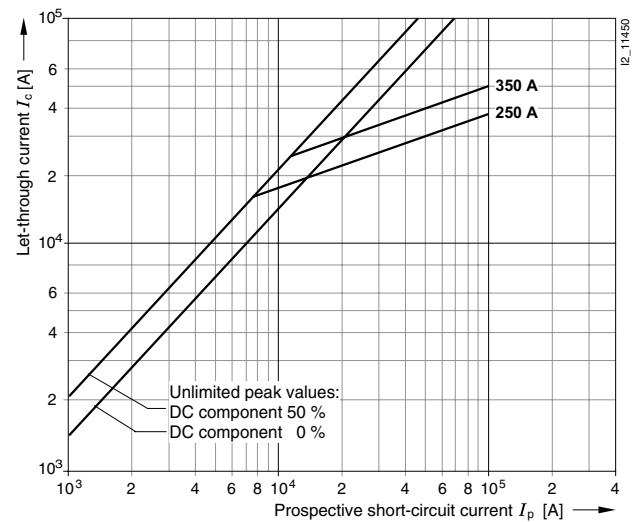

Peak arc voltage

